

n **Vf**
PAGE 255~257

OSAWA NORM

NEW




UHCRB2

Ø mm	-6
tol. D µ	0 / -12
tol. R µ	±5

UHLNB2

Ø mm	-0.8	≥0.8
tol. D µ	0 / -12	0 / -20
tol. R µ	0 / -20	0 / -20

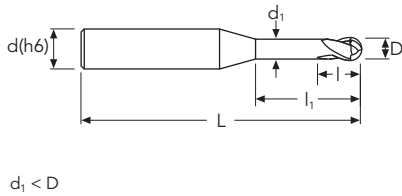

D	d	l	l1	L	Stock	Stock
mm 1.6	4	1.3	12	50		●
1.6	4	1.3	16	50		●
1.6	4	1.3	20	60		○
1.8	4	1.4	8	50		●
1.8	4	1.4	12	50		●
1.8	4	1.4	16	50		●
1.8	4	1.4	20	60		○
2	4	1.6	4	50		●
2	4	1.6	6	50		●
2	6	3	6	50	●	
2	4	1.6	8	50		●
2	4	1.6	10	50		●
2	4	3	10	50	■	
2	4	1.6	12	50		●
2	6	3	12	50	●	
2	4	1.6	14	50		●
2	4	3	16	50	■	
2	4	1.6	16	50		●
2	4	1.6	18	60		●
2	6	3	20	50	●	
2	4	1.6	20	60		●
2	4	1.6	22	60		●
2	4	3	25	60	■	
2	4	1.6	25	75		●
2	4	3	30	70	■	
2	4	1.6	30	75		●
3	6	2.4	8	50		●
3	6	2.4	10	50		●
3	6	2.4	12	50		●
3	6	4	12	55	■	
3	6	2.4	16	50		●
3	6	4	16	55	■	
3	6	2.4	20	60		●
3	6	4	20	60	■	
3	6	2.4	25	75		●
3	6	4	30	70	■	

● stock standard ○ non-standard stock ■ stock exhaustion