

n **Vf**
PAGE 255~257

OSAWA NORM

UHCRB2



Ø mm	-6
tol. D µ	0 / -12
tol. R µ	±5

UHLNB2

Ø mm	-0.8	≥0.8
tol. D µ	0 / -12	0 / -20
tol. R µ	0 / -20	0 / -20

NEW

UHCRB2 UHLNB2

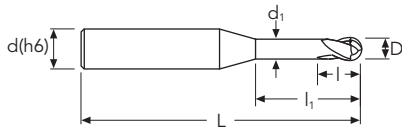

$d_1 < D$

D	d	l	l1	L	UHCRB2 Stock	UHLNB2 Stock
mm 3	6	2.4	30	75		●
3	6	2.4	35	75		●
4	6	3.2	10	50		●
4	6	5	16	55	■	
4	6	3.2	16	60		●
4	6	3.2	20	60		●
4	6	3.2	25	75		●
4	6	5	30	70	■	
4	6	3.2	30	75		●
4	6	3.2	35	75		●
4	6	5	40	80	■	
4	6	3.2	40	100		●
4	6	3.2	45	100		○
4	6	3.2	50	100		○

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS