





OSAWA  
NORM

NEW

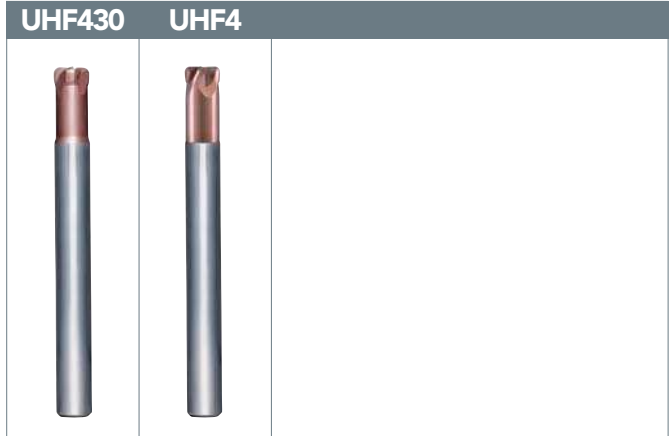

<b>UHF430</b>	
Ø mm	~12
tol. D µ	0 / -20
tol. R µ	±5

<b>UHF4</b>	
Ø mm	~12
tol. D µ	0 / -30
tol. R µ	0 / -20

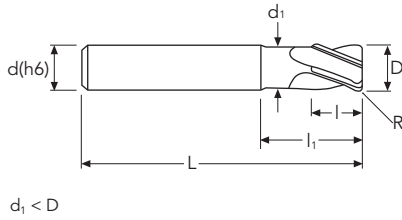

NMG UH RED	NMG UH RED

D	d	l	l1	L	Stock	Stock
mm 2 R0.5	6	1	6	70		●
3 R0.5	6	1.2	8	70		●
4 R0.5	6	1.5	10	70		●
5 R0.5	6	2	10	70	■	●
6 R0.5	6	2.5	12	90	■	●
6 R1	6	2.5	12	90	■	●
8 R1	8	3.5	16	100	■	●
8 R2	8	3.5	16	100	■	●
10 R1	10	4	20	100	■	●
10 R2	10	4	20	100	■	●
12 R2	12	5	25	110		●
12 R3	12	5	25	110		●

● stock standard   ○ non-standard stock   ■ stock exhaustion