

n Vf
PAGE 260~262

**OSAWA
NORM**



UHCR2

Ø mm	~4
tol. D µ	0 / -12

UHLN2

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

NEW

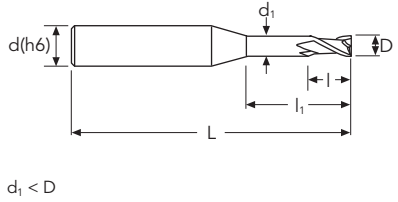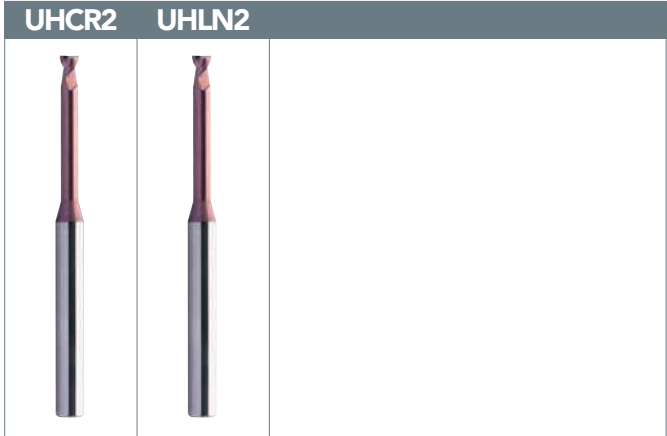

Z2

Z2

NMG
UH RED

NMG
UH RED

UH

UH

30°

40°

D	d	l	l1	L	Stock	Stock
mm 0.1	4	0.15	0.3	45	■	●
0.2	4	0.3	0.5	50	■	●
0.2	4	0.3	1	45	■	●
0.2	4	0.3	1	50	■	●
0.2	4	0.3	1.5	50	■	●
0.3	4	0.4	1	50	■	●
0.3	4	0.45	1.5	45	■	●
0.3	4	0.4	2	50	■	●
0.3	4	0.45	3	45	■	●
0.3	4	0.4	3	50	■	●
0.4	4	0.6	2	50	■	●
0.4	4	0.6	3	50	■	●
0.4	4	0.6	4	50	■	●
0.4	4	0.6	5	45	■	●
0.4	4	0.6	5	50	■	●
0.5	4	0.7	2	45	■	●
0.5	4	0.7	2	50	■	●
0.5	4	0.7	4	45	■	●
0.5	4	0.7	4	50	■	●
0.5	4	0.7	6	50	■	●
0.5	4	0.7	8	50	■	●
0.6	4	0.9	2	50	■	●
0.6	4	0.9	4	45	■	●
0.6	4	0.9	4	50	■	●
0.6	4	0.9	6	45	■	●
0.6	4	0.9	6	50	■	●
0.6	4	0.9	8	50	■	●
0.6	4	0.9	10	50	■	●
0.7	4	1	2	50	■	●
0.7	4	1	4	50	■	●
0.7	4	1	6	50	■	●
0.7	4	1	8	50	■	●
0.7	4	1	10	50	■	●
0.8	4	1.2	4	50	■	●
0.8	4	1.2	6	50	■	●
0.8	4	1.2	8	45	■	●

● stock standard ○ non-standard stock ■ stock exhaustion