

	OSAWA NORM
PAGE 260~262	



UHCR2

Ø mm	~4
tol. D µ	0 / -12

UHLN2

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

NEW

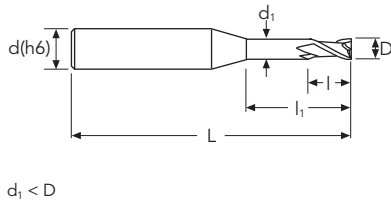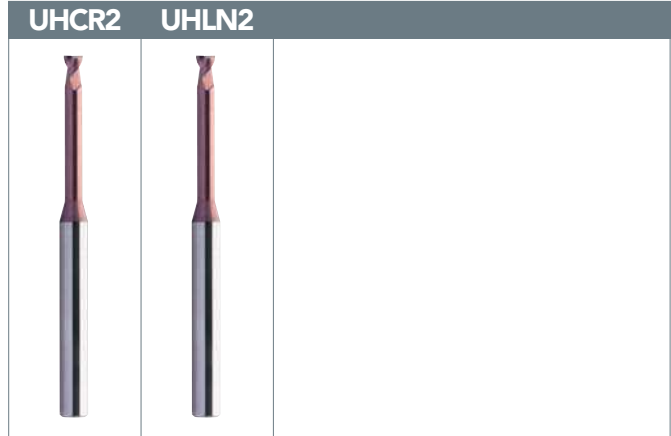

NMG UH RED	NMG UH RED
UH	UH

D	d	l	l1	L	Stock	Stock
mm 1.6	4	2.4	8	50		●
1.6	4	2.4	10	50		●
1.6	4	2.4	12	50		●
1.6	4	2.4	14	50		○
1.6	4	2.4	16	50		●
1.6	4	2.4	18	60		○
1.6	4	2.4	20	60		●
1.8	4	2.7	6	50		●
1.8	4	2.7	8	50		●
1.8	4	2.7	10	50		●
1.8	4	2.7	12	50		●
1.8	4	2.7	14	50		○
1.8	4	2.7	16	50		●
1.8	4	2.7	18	60		●
1.8	4	2.7	20	60		●
2	4	3	6	50	■	●
2	4	3	8	50		●
2	4	3	10	50		●
2	4	3	12	50	■	●
2	4	3	14	50		○
2	4	3	16	50	■	●
2	4	3	18	60		○
2	4	3	20	55	■	
2	4	3	20	60		●
2	4	3	25	75		●
2	4	3	30	75		●
2.5	4	3.7	8	50		●
2.5	4	3.7	10	50		●
2.5	4	3.7	12	50		●
2.5	4	3.7	14	50		○
2.5	4	3.7	16	50		●
2.5	4	3.7	18	60		○
2.5	4	3.7	20	60		●
2.5	4	3.7	25	75		●
2.5	4	3.7	30	75		●
3	6	4.5	8	50		●

● stock standard ○ non-standard stock ■ stock exhaustion