

**n** **Vf**  
PAGE 260~262

**OSAWA NORM**


**UHCR2**

Ø mm	~4
tol. D µ	0 / -12

**UHLN2**

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

**NEW**

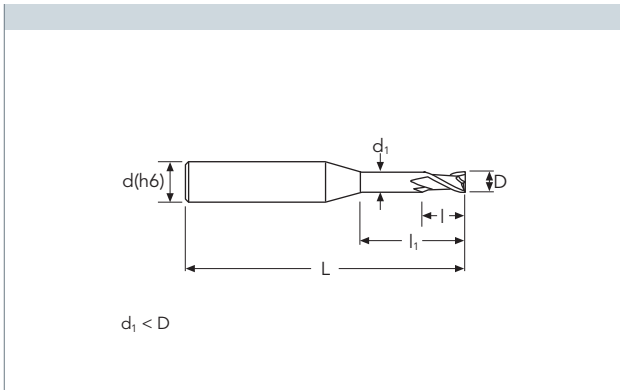

NMG <b>UH RED</b>	NMG <b>UH RED</b>
<b>UH</b>	<b>UH</b>

D	d	l	l1	L	Stock	Stock
mm 3	6	4.5	10	50		●
3	6	4.5	12	50		●
3	6	4.5	12	55	■	○
3	6	4.5	14	50		○
3	6	4.5	16	55	■	
3	6	4.5	16	60		●
3	6	4.5	18	60		○
3	6	4.5	20	60	■	●
3	6	4.5	25	75		●
3	6	4.5	30	70	■	
4	6	6	10	60		●
4	6	6	15	60		●
4	6	6	20	60	■	●
4	6	6	25	75		●
4	6	6	30	75		●
4	6	6	40	75		●
4	6	6	40	80	■	

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS