


n **Vf**
PAGE 261~263

OSAWA NORM

NEW

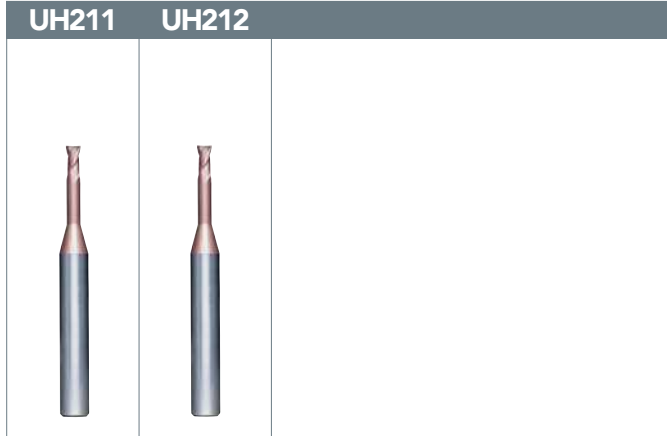


UH211

Ø mm	~6	>6
tol. D µ	0 / -12	0 / -15
tol. R µ	±10	±15

UH212

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20
tol. R µ	±10	±10

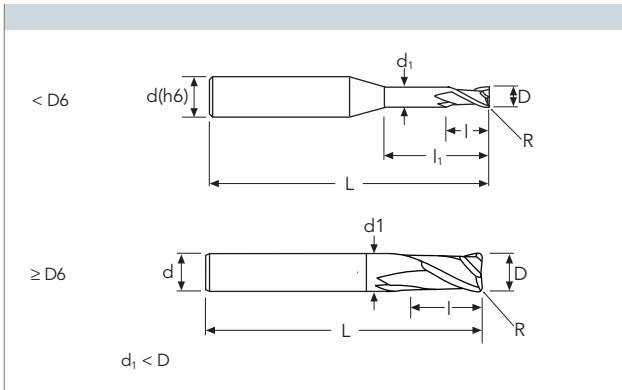

NMG UH RED	NMG UH RED

D	d	l	l1	L	Stock	Stock
2.5	R0.2	4	3.5	8	■	
2.5	R0.2	4	3.5	12	■	
2.5	R0.3	4	3.7	8		●
2.5	R0.3	4	3.7	10		●
2.5	R0.3	4	3.7	12		●
2.5	R0.3	4	3.7	14		○
2.5	R0.3	4	3.7	16		●
2.5	R0.3	4	3.7	18		○
2.5	R0.3	4	3.7	20		●
2.5	R0.3	4	3.7	25		●
2.5	R0.3	4	3.7	30		●
3	R0.2	6	4.5	10	■	
3	R0.2	6	4.5	16	■	
3	R0.3	6	4.5	8		●
3	R0.3	6	4.5	10		●
3	R0.3	6	4.5	10	●	
3	R0.3	6	4.5	12		●
3	R0.3	6	4.5	14		●
3	R0.3	6	4.5	16	●	
3	R0.3	6	4.5	16		●
3	R0.3	6	4.5	18		●
3	R0.3	6	4.5	20		●
3	R0.3	6	4.5	25		●
3	R0.5	6	4.5	10	●	
3	R0.5	6	4.5	16	●	
4	R0.2	6	6	20	●	
4	R0.3	6	6	12	●	
4	R0.3	6	6	20	●	
4	R0.4	6	4.5	10		●
4	R0.4	6	4.5	15		●
4	R0.4	6	4.5	20		●
4	R0.4	6	4.5	25		●
4	R0.4	6	4.5	30		●
4	R0.4	6	4.5	40		●
4	R0.5	6	6	12	●	
4	R0.5	6	6	20	●	

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS