
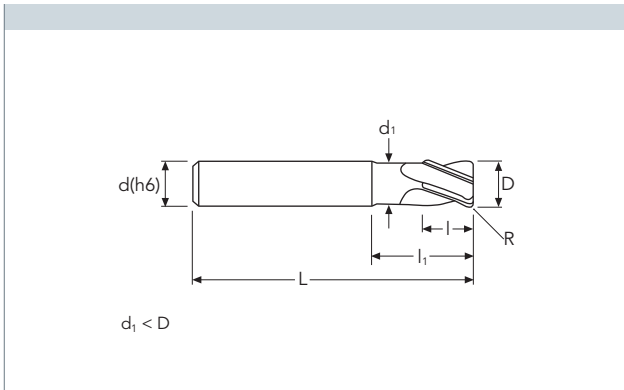


n **Vf**
PAGE 264

OSAWA
NORM

UHCS4

Ø mm	~6	>6
tol. D µ	0 / -12	0 / -15
tol. R µ	±10	±15

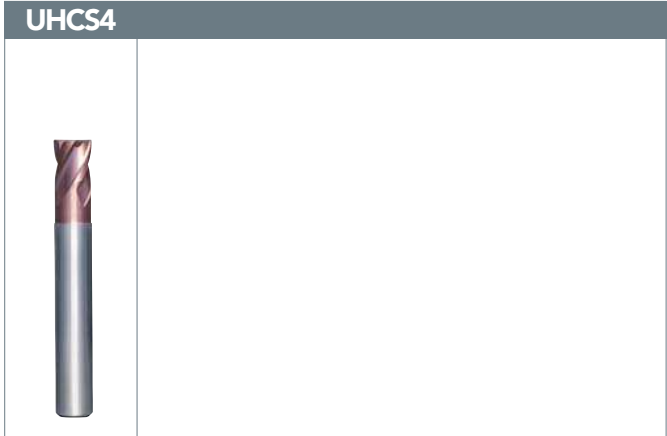

D	d	l	l1	L	Stock
mm 1 R0.1	4	2	3	50	●
1.5 R0.1	4	2.5	4	50	●
2 R0.1	4	3	6	50	●
3 R0.1	6	4	8	55	●
4 R0.1	6	6	10	55	●
5 R0.2	6	6	11	50	●
6 R0.2	6	9	15	60	●
8 R0.2	8	12	20	70	●
10 R0.2	10	15	25	70	●
12 R0.3	12	18	30	80	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS