


PAGE 266

OSAWA
NORM

UH610R - UH611R

Ø mm	~20
tol. D µ	0 / -30
tol. R µ	±15

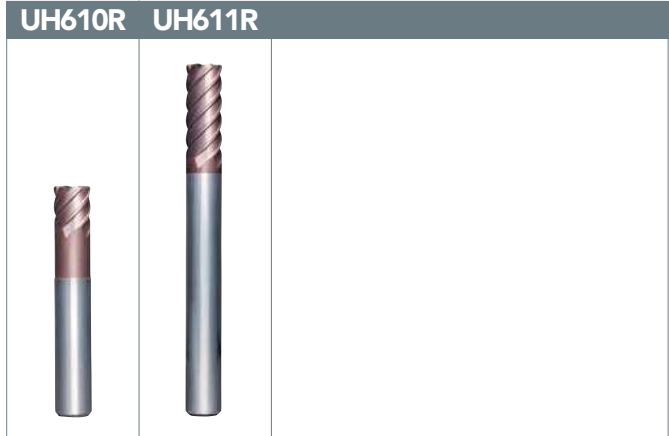

Z6

NMG
UH RED

UH RADIUS

45°

Z6

NMG
UH RED

UH RADIUS

45°

D	d	l	l1	L	Stock	Stock
mm 6 R0.5	6	6	15	50	●	●
6 R0.5	6	15		70	●	●
8 R0.5	8	8	25	60	●	●
8 R0.5	8	20		100		●
10 R0.5	10	25	30	100		●
10 R1.0	10	10	30	70	●	
10 R1.0	10	25		100		●
12 R1.0	12	12	30	75	●	
12 R0.5	12	30		110		●
12 R1.0	12	30		110		●
16 R1.0	16	32		130		●
20 R1.0	20	38		140		●
20 R2.0	20	38		140		●

● stock standard ○ non-standard stock ■ stock exhaustion