

**n** **Vf**  
PAGE  
268~270

**OSAWA  
NORM**

**MEXCRB2**



Ø mm	-6
tol. D µ	0 / -12
tol. R µ	±10

**MEXLNB2**

Ø mm	-0.8	≥0.8
tol. D µ	0 / -12	0 / -20
tol. R µ	0 / -20	0 / -20

**NEW**

**MEXCRB2 MEXLNB2**

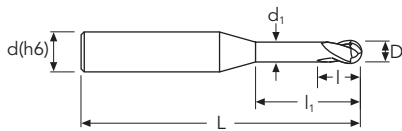

$d_1 < D$


D	d	l	l1	L	Stock	Stock
mm 0.2	4	0.2	0.5	50		●
0.2	4	0.2	1	50		●
0.2	4	0.2	1.5	50		●
0.3	4	0.3	1	50		●
0.3	4	0.3	2	50		●
0.3	4	0.3	3	50		●
0.4	4	0.4	1	50		●
0.4	4	0.4	2	50		●
0.4	4	0.4	3	45	■	
0.4	4	0.4	3	50		●
0.4	4	0.4	4	50		●
0.4	4	0.4	5	50		●
0.5	4	0.4	2	50		●
0.5	6	0.5	2.5	60		●
0.5	4	0.4	3	50		●
0.5	4	0.4	4	50		●
0.5	4	0.4	5	50		●
0.5	4	0.5	6	45	■	
0.5	4	0.4	6	50		●
0.5	4	0.5	8	45	■	
0.5	4	0.4	8	50		●
0.6	4	0.5	2	50		●
0.6	4	0.5	3	50		●
0.6	4	0.5	4	50		●
0.6	4	0.5	5	50		●
0.6	4	0.6	6	45	■	
0.6	4	0.5	6	50		●
0.6	6	0.6	6	60		●
0.6	4	0.6	8	45	■	
0.6	4	0.5	8	50		●
0.8	4	0.6	2	50		●
0.8	4	0.6	4	50		●
0.8	6	0.8	4	60		●
0.8	4	0.8	6	45	■	
0.8	4	0.6	6	50		●
0.8	4	0.8	8	45	■	

● stock standard ○ non-standard stock ■ stock exhaustion