

PAGE 268~270

OSAWA
NORM

MEXCRB2



Ø mm	-6
tol. D µ	0 / -12
tol. R µ	±10

MEXLNB2

Ø mm	-0.8	≥0.8
tol. D µ	0 / -12	0 / -20
tol. R µ	0 / -20	0 / -20

NEW

MEXCRB2 MEXLNB2

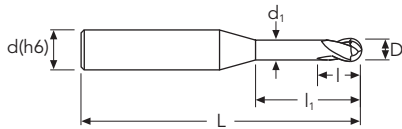

$d_1 < D$

D	d	l	l1	L	Stock	Stock
mm 1.5	4	1.2	12	50		●
1.5	6	2.3	12	60		●
1.5	4	1.5	16	50	●	●
1.5	4	1.2	16	50		●
1.5	6	2.3	16	60		●
1.5	4	1.2	18	60		●
1.5	4	1.5	20	55	■	
1.6	4	1.3	8	50		●
1.6	4	1.3	12	50		●
1.6	4	1.3	16	50		●
1.6	6	2.4	16	60		●
1.6	4	1.6	20	55	■	
1.6	4	1.3	20	60		●
1.8	4	1.4	8	50		●
1.8	4	1.4	12	50		●
1.8	4	1.4	16	50		●
1.8	4	1.4	16	50	■	
1.8	6	2.7	16	60		●
1.8	4	1.8	20	55	■	
1.8	4	1.4	20	60		●
2	4	1.6	4	50		●
2	4	1.6	6	50		●
2	4	2	8	45	●	
2	4	1.6	8	50		●
2	4	1.6	10	50		●
2	4	2	12	50	●	
2	4	1.6	12	50		●
2	6	3	12	60		●
2	4	1.6	14	50		●
2	4	2	16	50	●	
2	4	1.6	16	50		●
2	6	3	16	60		●
2	4	1.6	18	60		●
2	4	2	20	55	●	
2	4	1.6	20	60		●
2	6	3	20	75		●

● stock standard ○ non-standard stock ■ stock exhaustion