


n **Vf**
PAGE 271-272

OSAWA NORM

| | | |
|---------------|---------|---------|
| MEXM2 | | |
| Ø mm | ~0.8 | ≥0.8 |
| tol. D µ | 0 / -12 | 0 / -20 |
| MEXCS2 | | |
| Ø mm | ~25 | |
| tol. D µ | 0 / -12 | |
| MEXCL2 | | |
| Ø mm | ~16 | |
| tol. D µ | 0 / -30 | |

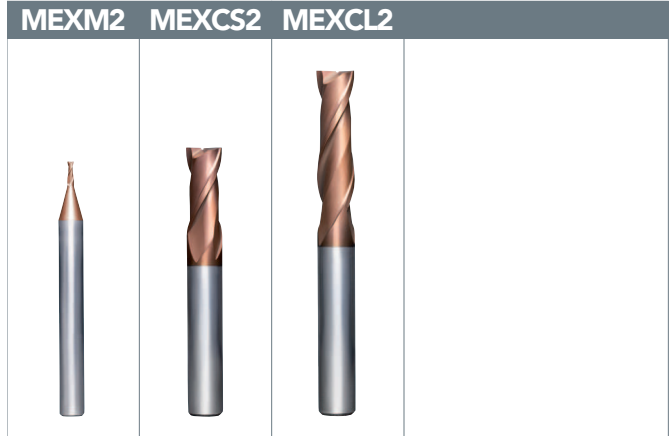

| | | | | |
|--------------------------|--|--|--|--|
| <p>MEXM2</p> | | | | |
| | | | | |
| <p>MEXCS2 MEXCL2</p> | | | | |
| | | | | |

| D | d | l | l1 | L | Stock | Stock | Stock |
|------|----|----|----|-----|-------|-------|-------|
| mm 5 | 6 | 13 | | 55 | | ● | |
| 5 | 6 | 25 | | 70 | | ● | |
| 5.5 | 6 | 14 | | 55 | | ● | |
| 6 | 6 | 15 | | 60 | | ● | |
| 6 | 6 | 25 | | 70 | | ● | |
| 6.5 | 8 | 17 | | 65 | | ○ | |
| 7 | 8 | 18 | | 65 | | ● | |
| 8 | 8 | 20 | | 70 | | ● | |
| 8 | 8 | 30 | | 80 | | ● | |
| 8.5 | 10 | 21 | | 70 | | ● | |
| 9 | 10 | 23 | | 70 | | ● | |
| 10 | 10 | 22 | | 75 | | ● | |
| 10 | 10 | 35 | | 90 | | ● | |
| 11 | 12 | 28 | | 75 | | ● | |
| 12 | 12 | 26 | | 80 | | ● | |
| 12 | 12 | 40 | | 90 | | ● | |
| 14 | 14 | 32 | | 90 | | ● | |
| 16 | 16 | 32 | | 90 | | ● | |
| 18 | 18 | 38 | | 100 | | ● | |
| 20 | 20 | 38 | | 100 | | ● | |
| 22 | 22 | 40 | | 100 | | ○ | |
| 25 | 25 | 40 | | 100 | | ○ | |

MEXCS2 ≥ Ø14 =

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS