

n **Vf**
PAGE
273~275

**OSAWA
NORM**

MEXCR2



Ø mm	~6
tol. D µ	0 / -12

MEXLN2

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

NEW

MEXCR2 MEXLN2

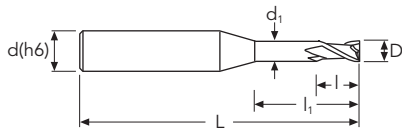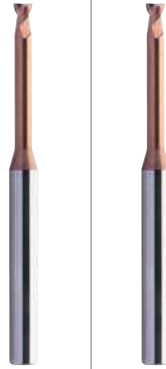

$d_1 < D$

D	d	l	l1	L	Stock	Stock
mm 0.2	4	0.3	0.5	50		●
0.2	4	0.3	1	50		●
0.2	4	0.3	1.5	50		●
0.3	4	0.4	1	50		●
0.3	4	0.4	2	50		●
0.3	4	0.4	3	50		●
0.4	4	0.6	2	50		●
0.4	4	0.6	3	50		●
0.4	4	0.6	4	45	■	
0.4	4	0.6	4	50		●
0.4	4	0.6	5	50		●
0.5	4	0.7	2	50		●
0.5	4	0.7	4	50		●
0.5	4	0.7	6	45	■	
0.5	4	0.7	6	50	■	●
0.5	4	0.7	8	45		●
0.5	4	0.7	8	50		●
0.6	4	0.9	2	50		●
0.6	4	0.9	4	50		●
0.6	4	0.9	6	45	■	
0.6	4	0.9	6	50		●
0.6	4	0.9	8	45	■	
0.6	4	0.9	8	50		●
0.6	4	0.9	10	50		●
0.7	4	1	2	50		●
0.7	4	1	4	50		●
0.7	4	1	6	45	■	
0.7	4	1	6	50		●
0.7	4	1	8	50		●
0.7	4	1	10	50		●
0.8	4	1.2	4	50		●
0.8	4	1.2	6	45	■	
0.8	4	1.2	6	50		●
0.8	4	1.2	8	50		●
0.8	4	1.2	10	50		●
0.8	4	1.2	12	45	■	
0.8	4	1.2	12	50		●

● stock standard ○ non-standard stock ■ stock exhaustion