

n **Vf**
PAGE
273~275

**OSAWA
NORM**

MEXCR2



Ø mm	~6
tol. D µ	0 / -12

MEXLN2

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

NEW

MEXCR2 MEXLN2

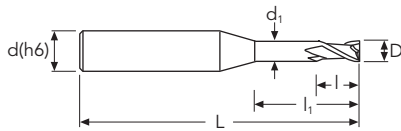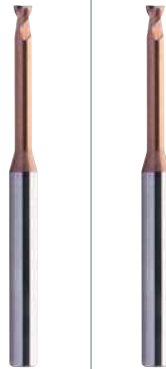

$d_1 < D$

D	d	l	l1	L	Stock	Stock
mm 1.5	4	2.3	16	50	●	
1.5	4	2.3	18	60		●
1.5	4	2.3	20	55	●	
1.5	4	2.3	20	60		●
1.6	4	2.4	6	50		●
1.6	4	2.4	8	50		●
1.6	4	2.4	10	50		●
1.6	4	2.4	12	50		●
1.6	4	2.4	14	50		○
1.6	4	2.4	16	50		●
1.6	4	2.4	18	60		○
1.6	4	2.4	20	55	■	
1.6	4	2.4	20	60		●
1.8	4	2.7	6	50		●
1.8	4	2.7	8	50		●
1.8	4	2.7	10	50		●
1.8	4	2.7	12	50		●
1.8	4	2.7	14	50		○
1.8	4	2.7	16	50		●
1.8	4	2.7	18	60		○
1.8	4	2.7	20	60		●
2	4	3	6	50		●
2	4	3	8	50		●
2	4	3	10	50		●
2	4	3	12	45	●	
2	4	3	12	50		●
2	4	3	14	50		●
2	4	3	16	50	●	
2	4	3	16	50		●
2	4	3	18	60		●
2	4	3	20	55	●	
2	4	3	20	60		●
2	4	3	25	75		●
2	4	3	26	60	■	
2	4	3	30	70	■	
2	4	3	30	75		●
2.5	4	3.7	8	50		●
2.5	4	3.7	10	50		●

● stock standard ○ non-standard stock ■ stock exhaustion