

PAGE 273~275

OSAWA
NORM

MEXCR2



Ø mm	~6
tol. D µ	0 / -12

MEXLN2

Ø mm	~0.8	≥0.8
tol. D µ	0 / -12	0 / -20

NEW

MEXCR2 MEXLN2

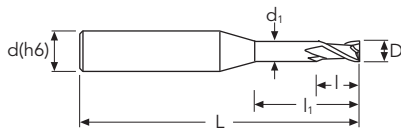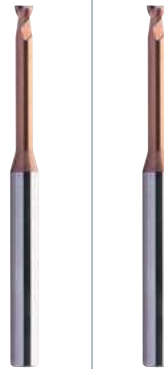

$d_1 < D$

D	d	l	l1	L	Stock	Stock
mm 2.5	4	3.7	12	45	■	●
2.5	4	3.7	12	50		○
2.5	4	3.7	14	50		●
2.5	4	3.7	16	50		○
2.5	4	3.7	18	60		○
2.5	4	3.7	20	60	■	●
2.5	4	3.7	20	60		●
2.5	4	3.7	25	60		●
2.5	4	3.7	30	75		●
2.5	4	3.7	30	80	■	●
3	6	4.5	8	50		●
3	6	4.5	10	50		●
3	6	4.5	12	50		●
3	6	4.5	14	50	■	●
3	6	4.5	14	50		●
3	6	4.5	16	60		●
3	6	4.5	18	55	■	●
3	6	4.5	18	60		●
3	6	4.5	20	60		●
3	6	4.5	25	75		●
3	6	4.5	26	65	■	●
3	6	4.5	30	70	■	●
3	6	4.5	40	90	■	●
4	6	4.5	10	60		●
4	6	4.5	15	60		●
4	6	4.5	20	60		●
4	6	6	20	60	■	●
4	6	4.5	25	75		●
4	6	6	26	70	■	●
4	6	4.5	30	75		●
4	6	4.5	40	75		●
4	6	6	40	90	■	●
5	6	7.5	26	70	■	●
5	6	7.5	30	80	■	●
5	6	7.5	50	110	■	●
6	6	9	30	90	■	●
6	6	9	50	110	■	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS