

n **Vf**
PAGE 276

OSAWA
NORM


NEW

MEXCS4

Ø mm	~25
tol. D µ	0 / -30

MEXCL4

Ø mm	~20
tol. D µ	0 / -20

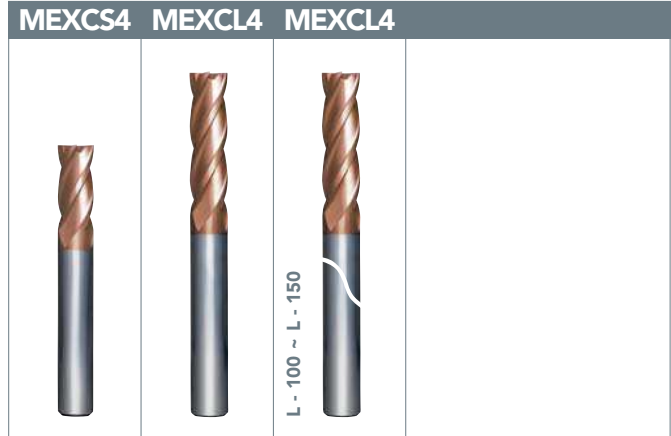

D	d	l	l1	L	Stock	Stock	Stock
mm 1	4	3		40	●		
1.5	4	4.5		40	●		
2	4	6		40	●		
2	6	8		60		●	
2.5	4	8		40	●		
3	6	8		45	●		
3	6	15		60		●	
3	6	25		100			●
3.5	6	10		45	●		
4	6	11		45	●		
4	6	20		60		●	
4	6	31		100			●
4.5	6	11		45	●		
5	6	13		50	●		
5	6	25		70		●	
5	6	31		100			●
5.5	6	13		50	●		
6	6	13		50	●		
6	6	25		70		●	
6	6	38		100			●
6.5	8	17		65	●		
7	8	18		65	●		
8	8	20		70	●		
8	8	30		80		●	
8	8	41		100			●
9	10	23		70	●		
10	10	22		75	●		
10	10	35		90		●	
10	10	57		125			●
11	12	28		75	●		
12	12	26		80	●		
12	12	40		90		●	
12	12	75		150			●
14	12	35		90	●		
14	16	50		110		●	
14	14	75		150			●

● stock standard ○ non-standard stock ■ stock exhaustion