


n **Vf**
PAGE 276

**OSAWA
NORM**

MEXCS4 - MEXCL4

Ø mm	~25
tol. D µ	0 / -30

NEW

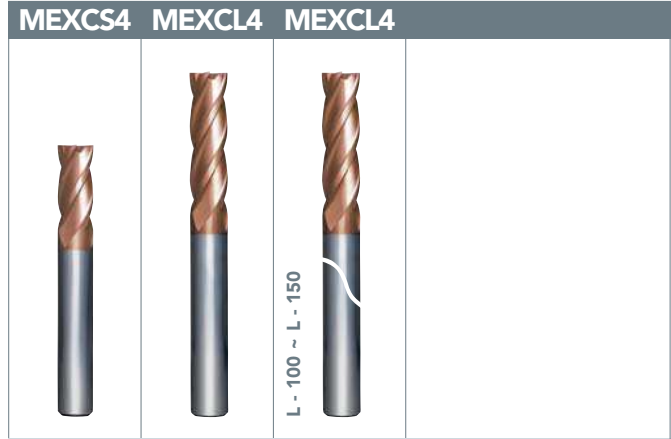

					Z4	Z4	Z4	
					UMG ENDLESS ORANGE	UMG ENDLESS ORANGE	UMG ENDLESS ORANGE	
					MEX	MEX	MEX	
					30°	30°	30°	
D	d	l	l1	L	Stock	Stockq	Stock	
mm 16	16	32		100	●			
16	16	50		110		●		
16	16	75		150			●	
18	20	50		110		○		
20	20	38		105	●			
20	20	55		110		●		
20	20	75		150			●	
22	22	40		100	○			
25	25	40		100	●			
25	25	50		120	■			
25	25	70		130		●		

MEXCS4 ≤ Ø1.5 = 40°
 ≥ Ø22 = 40°

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS