


PAGE 282-283

OSAWA
NORM

MEX610R - MEX611R

Ø mm	~20
tol. D µ	0 / -30
tol. R µ	±20

MEX610R MEX611R

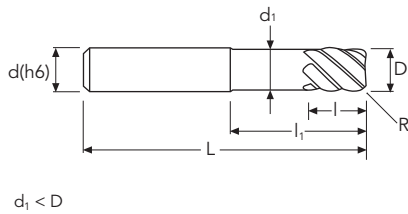

D	d	l	l1	L	Stock	Stock
mm 6 R0.5	6	6	14	50	●	●
6 R0.5	6	15		90	●	●
8 R0.5	8	8	24	60	●	●
8 R0.5	8	20		100		●
10 R0.5	10	25		100		●
10 R1.0	10	10	30	70	●	●
10 R1.0	10	25		100		●
12 R0.5	12	30		100		●
12 R1.0	12	12	30	75	●	●
12 R1.0	12	30		100		●

● stock standard ○ non-standard stock ■ stock exhaustion

TYPHOON

C-SD-TA

LFTA

SUTA

HSS-HSS/CO DRILLS

UH RED

MEX ORANGE

HF EVO

MEF ENDLESS

ALU

MDC

G2

MDTA

ULTRA MILLS

HSS/CO

CARBIDE BURRS

PARAMETERS