


 PAGE 278


OSAWA
NORM

MEX410R



MEX410R

Ø mm	~6	>6
tol. D µ	0 / -12	0 / -15
tol. R µ	±20	±20

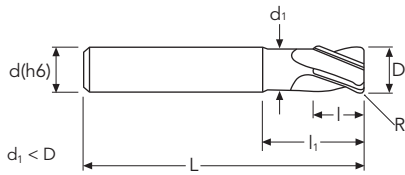

D	d	l	l1	L	Stock
mm 2 R0.2	6	2.5	5	50	●
2.5 R0.25	6	3	6	50	●
3 R0.3	6	4	7	50	●
4 R0.5	6	5	9	50	●
5 R0.5	6	6	12	50	●
6 R0.5	6	7	14	60	●
8 R1.0	8	10	18	70	●
10 R1.0	10	12	25	75	●
12 R1.0	12	15	30	80	●

● stock standard ○ non-standard stock ■ stock exhaustion