

n **Vf**
PAGE
278~282

**OSAWA
NORM**


MEXCL2R - MEXCL4R

Ø mm	~6	>6
tol. D µ	0 / -12	0 / -15
tol. R µ	±20	±20

MEXLS2R - MEXLS4R

Ø mm	~16
tol. D µ	0 / -20
tol. R µ	±10

NEW **NEW**
MEXCL2R MEXLS2R MEXCL4R MEXLS4R

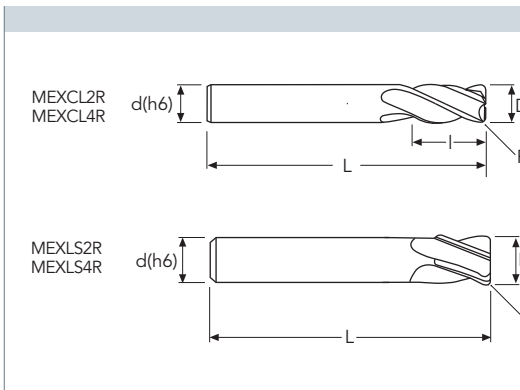

D	d	l	L	Stock	Stock	Stock	Stock
mm							
2	R0.3	6	4	75	●	●	●
3	R0.3	6	8	50	■	●	●
3	R0.3	6	5	75	■	●	●
3	R0.5	6	5	75	■	●	●
4	R0.3	6	10	50	■	●	●
4	R0.3	6	8	75	■	●	●
4	R0.5	6	10	50	■	●	●
4	R0.5	6	8	75	■	●	●
5	R0.3	6	13	50	■	●	●
5	R0.3	6	9	75	■	●	●
5	R0.5	6	13	50	■	●	●
5	R0.5	6	9	75	■	●	●
6	R0.3	6	15	60	■	●	●
6	R0.3	6	10	75	■	●	●
6	R0.5	6	15	60	■	●	●
6	R0.5	6	10	75	■	●	●
6	R1.0	6	15	60	■	●	●
6	R1.0	6	10	75	■	●	●
8	R0.3	8	12	75	■	●	●
8	R0.5	8	20	70	■	●	●
8	R0.5	8	12	75	■	●	●
8	R1.0	8	20	70	■	●	●
8	R1.0	8	12	75	■	●	●
8	R2.0	8	25	70	■	●	●
10	R0.3	10	25	90	■	●	●
10	R0.5	10	25	90	■	●	●
10	R0.5	10	14	100	■	●	●
10	R1.0	10	25	90	■	●	●
10	R1.0	10	14	100	■	●	●
10	R2.0	10	25	90	■	●	●
10	R2.0	10	14	100	■	○	○
12	R0.5	12	30	100	■	○	○
12	R0.5	12	16	100	■	●	●
12	R1.0	12	30	100	■	●	●
12	R1.0	12	16	100	■	●	●
12	R2.0	12	30	100	■	●	●
12	R2.0	12	16	100	■	○	○
16	R0.5	16	22	125	■	●	●
16	R1.0	16	22	125	■	●	●
16	R2.0	16	40	110	■	●	●
16	R2.0	16	22	125	■	○	○

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS