

n **Vf**
PAGE 290


**OSAWA
NORM**

MCA212R



MCA212R

Ø mm	2~12
tol. D µ	0 / -30
tol. R µ	±

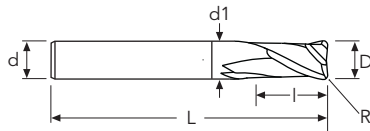

d1 < D



D	d(h6)	l	l1	L	Stock
mm 2 xR0.2	3	3	6	40	●
3 xR0.2	3	4	8	40	●
4 xR0.2	4	5	12	50	●
5 xR0.2	5	8	14	50	●
6 xR0.2	6	8	18	65	●
8 xR0.2	8	10	22	70	●
10 xR0.2	10	14	28	80	●
12 xR0.2	12	16	35	90	●

● stock standard ○ non-standard stock ■ stock exhaustion