


 PAGE 291


**OSAWA
NORM**

MDCAB2



MDCAB2

Ø mm	~6	8-12
tol. D µ	0 / -20	0 / -25
tol. R µ	± 10	± 10

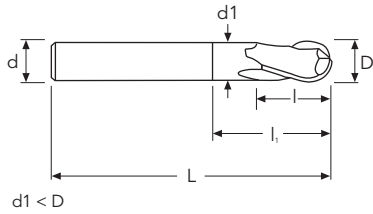

-  Z2 BALL
-  MG
-  LAPPED
-  ALU BALL NOSE
-  40°

D	d(h6)	l	l1	L	Stock
mm 1	4	2		50	●
1.5	4	3		50	●
2	4	4		50	●
3	4	6		50	●
4	4	8		50	●
5	6	10		50	●
6	6	12		50	●
8	8	16		60	●
10	10	20		75	●
12	12	24		75	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU**
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS