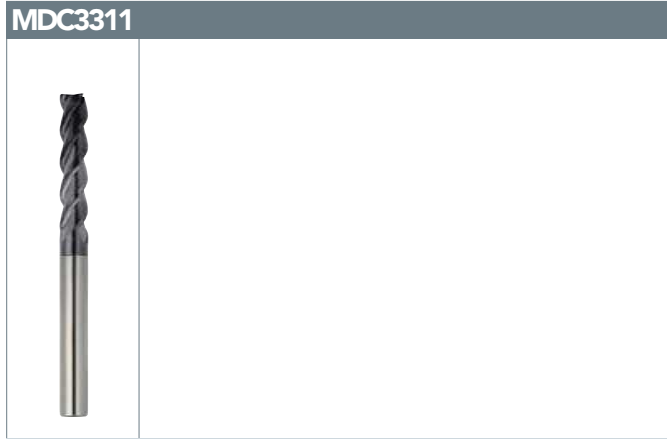


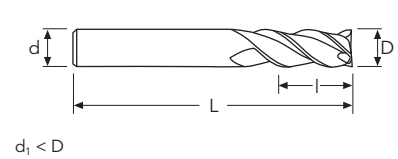

 PAGE 293

**OSAWA
NORM**

MDC3311

Ø mm	~12
tol. D µ	0 / -30
tol. R µ	±10





$d_1 < D$

Z3

MG

MDC RADIUS

30°

D	d(h6)	l	l1	L	Stock
mm 2	R0.15	2	9	60	●
3	R0.15	3	30	60	●
4	R0.2	4	30	60	●
5	R0.3	5	35	70	●
6	R0.3	6	40	100	●
8	R0.5	8	40	100	●
10	R0.5	10	40	100	●
12	R0.5	12	45	100	●

● stock standard ○ non-standard stock ■ stock exhaustion