


**n** **Vf**  
PAGE 303

**DIN 844**



**WS4 (6) TAWS4 (6)**

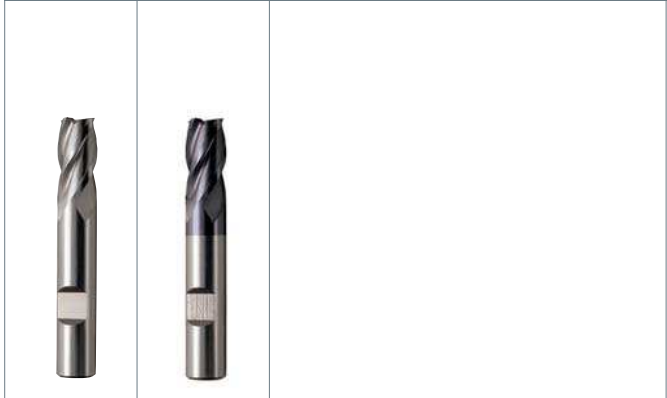

**WS4 - TAWS4**

Ø mm	2~40
tol. D µ	0 / +40

Z4-Z6  
HSS/Co  
BR  
N  
30°

Z4-Z6  
HSS/Co  
PV200  
N  
30°

D	d(h6)	l	L	Stock	Stock
mm 2	6	7	51	●	●
3	6	8	52	●	●
4	6	11	55	●	●
5	6	13	57	●	●
6	6	13	57	●	●
7	10	16	66	●	●
8	10	19	69	●	●
9	10	19	69	●	●
10	10	22	72	●	●
11	12	22	79	●	●
12	12	26	83	●	●
13	12	26	83	●	●
14	12	26	83	●	●
15	12	26	83	●	●
16	16	32	92	●	●
17	16	32	92	●	●
18	16	32	92	●	●
19	16	32	92	●	○
20	20	38	104	●	●
22	20	38	104	●	●
24	25	45	121	● (Z6)	○ (Z6)
25	25	45	121	●	●
26	25	45	121	●	○ (Z6)
28	25	45	121	● (Z6)	○ (Z6)
30	25	45	121	● (Z6)	● (Z6)
32	32	53	133	●	● (Z6)
36	32	53	133	●	● (Z6)
40	32	63	143	●	● (Z6)

● stock standard   ○ non-standard stock   ■ stock exhaustion