



DIN 844




WL3 - TAWL3 (e8)

Ø mm	~3	3.5~6	6.5~10	10.5~18	19~30	32~40
tol. D µ	-14 / -28	-20 / -38	-25 / -47	-32 / -59	-40 / -73	-50 / -89

WL4 - TAWL4

Ø mm	3~6	7~40
tol. D µ	0 / +40	0 / +50

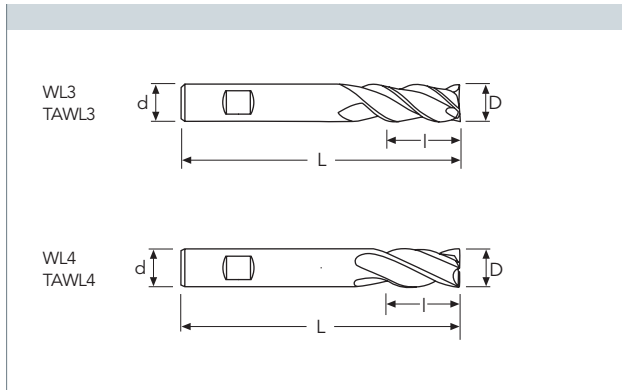

HSS/Co BR	HSS/Co PV200	HSS/Co BR	HSS/Co PV200
N	N	N	N

D	d(h6)	l	L	Stock	Stock	Stock	Stock
mm 3	6	12	56	●	●	●	○
4	6	19	63	●	●	●	○
5	6	24	68	●	●	●	○
6	6	24	68	●	●	●	●
7	10	30	80	●	●	●	○
8	10	38	88	●	●	●	●
9	10	38	88	●	●	●	○
10	10	45	95	●	●	●	●
11	12	45	102	●	●	●	○
12	12	53	110	●	●	●	●
13	12	53	110	●	●	●	○
14	12	53	110	●	●	●	●
15	12	53	110	●	●	●	○
16	16	63	123	●	●	●	●
17	16	63	123	●	●	●	●
18	16	63	123	●	●	●	●
19	16	63	123	●	●	●	○
20	20	75	141	●	●	●	●
22	20	75	141	●	○	●(Z6)	●(Z6)
25	25	90	166	●	○	●(Z6)	●(Z6)
30	25	90	166	●	●	●	●(Z6)
32	32	106	186	●	●	●	●(Z6)
36	32	106	186	●	●	●	●(Z6)
40	40	125	217	●	●	○	●(Z6)

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS