
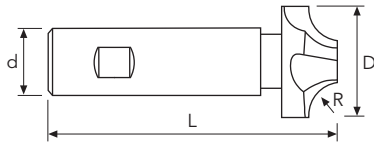


n **Vf**
PAGE 306

DIN 6518

WCR (H11)

Ø mm	8-12	13-20	21-28	31-52
tol. R µ	+60 / 0	+75 / 0	+90 / 0	+110 / 0

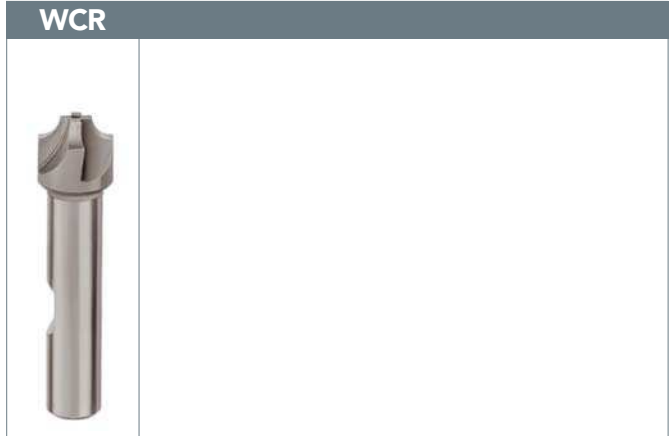

Z4
HSS/Co
BR
N
0°

D	R(H11)	d(h6)	L	Stock
mm 8	1.0	10	60	●
9	1.5	10	60	●
10	2.0	10	60	●
11	2.5	10	60	●
12	3.0	12	60	●
13	3.5	12	60	●
14	4.0	12	60	●
15	4.5	12	60	●
16	5.0	12	60	●
19	5.5	16	67	●
20	6.0	16	67	●
21	6.5	16	71	●
22	7.0	16	71	●
23	7.5	16	71	●
24	8.0	16	71	●
25	8.5	25	85	●
26	9.0	25	85	●
27	9.5	25	85	●
28	10.0	25	85	●
31	10.5	25	90	○
32	11.0	25	90	●
34	12.0	25	90	●
41	12.5	25	100	○
42	13.0	25	100	○
44	14.0	25	100	○
46	15.0	25	100	○
48	16.0	25	100	○
52	18.0	32	112	○
56	20	32	112	○

● stock standard ○ non-standard stock ■ stock exhaustion