





 PAGE 307


DIN
850

WWK (h11 - e8)


Ø mm	10~18	19~30	32~50
tol. D µ	0 / -110	0 / -130	0 / -160
tol. H µ	-32 / -59	-40 / -73	-50 / -89

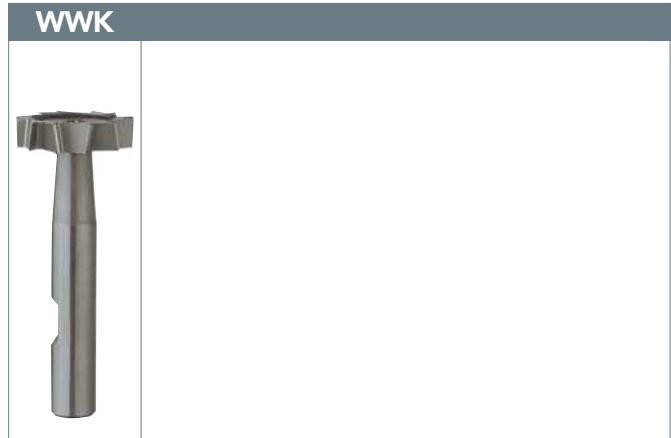

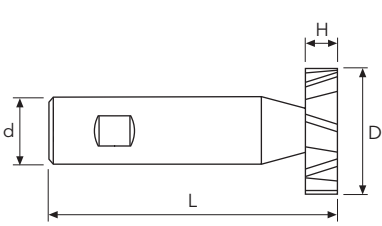





Z8-Z14




HSS/Co



BR



N



10°

D(h11)	d(h6)	H(e8)	L	Z	Stock
mm 10.5	6	2	50	8	●
10.5	6	2.5	50	8	●
10.5	6	3	50	8	●
13.5	10	2	56	8	●
13.5	10	2.5	56	8	●
13.5	10	3	56	8	●
13.5	10	4	56	8	●
16.5	10	2.5	56	8	●
16.5	10	3	56	8	●
16.5	10	4	56	8	●
16.5	10	5	56	8	●
19.5	10	3	63	8	●
19.5	10	4	63	8	●
19.5	10	5	63	8	●
19.5	10	6	63	8	●
22.5	10	4	63	10	●
22.5	10	5	63	10	●
22.5	10	6	63	10	●
22.5	10	8	63	10	●
25.5	10	5	63	10	●
25.5	10	6	63	10	●
25.5	10	7	63	10	●
25.5	10	8	63	10	●
28.5	10	5	63	10	●
28.5	10	6	63	10	●
28.5	10	7	63	10	○
28.5	10	8	63	10	○
32.5	12	5	71	12	●
32.5	12	6	71	12	●
32.5	12	7	71	12	○
32.5	12	8	71	12	●
32.5	12	10	71	12	●
38.5	12	7	71	12	●
38.5	12	8	71	12	○
38.5	12	9	71	12	○
38.5	12	10	71	12	○
45.5	12	10	71	14	○

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS