


n **Vf**
PAGE 250-251

DIN 345

145N - 145NTI - 245N (h8)

Ø mm	3.1~6	6.1~10	10.1~18	18.1~30	30.1~50	50.1~80
tol. D µ	0 / -18	0 / -22	0 / -27	0 / -33	0 / -39	0 / -46

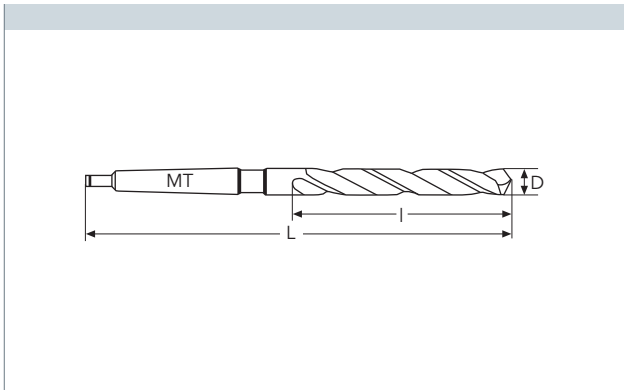

HSS OX	HSS TiN	HSS/CO HT

D(h8)	I	L	MT	Stock	Stock	Stock
mm 14.00	108	189	1	●	●	●
14.25	114	212	2	●	●	●
14.50	114	212	2	●	●	●
14.75	114	212	2	●	●	●
15.00	114	212	2	●	●	●
15.25	120	218	2	●	●	●
15.50	120	218	2	●	●	●
15.75	120	218	2	●	●	●
16.00	120	218	2	●	●	●
16.25	125	223	2	●	●	●
16.50	125	223	2	●	●	●
16.75	125	223	2	●	●	●
17.00	125	223	2	●	●	●
17.25	130	228	2	●	●	●
17.50	130	228	2	●	●	●
17.75	130	228	2	●	●	●
18.00	130	228	2	●	●	●
18.25	135	233	2	●	●	●
18.50	135	233	2	●	●	●
18.75	135	233	2	●	●	●
19.00	135	233	2	●	●	●
19.25	140	238	2	●	●	●
19.50	140	238	2	●	●	●
19.75	140	238	2	●	●	●
20.00	140	238	2	●	●	●
20.25	145	243	2	●	●	●
20.50	145	243	2	●	●	●
20.75	145	243	2	●	●	●
21.00	145	243	2	●	●	●
21.25	150	248	2	●	●	●
21.50	150	248	2	●	●	●
21.75	150	248	2	●	●	●
22.00	150	248	2	●	●	●
22.25	150	248	2	●	●	●
22.50	155	253	2	●	●	●
22.75	155	253	2	●	●	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS