





 PAGE 250-251

DIN 341

241LS (h8)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~30
tol. D µ	0 / -14	0 / -18	0 / -22	0 / -27	0 / -33

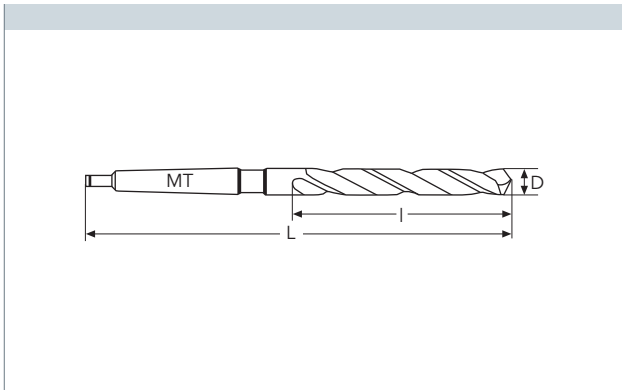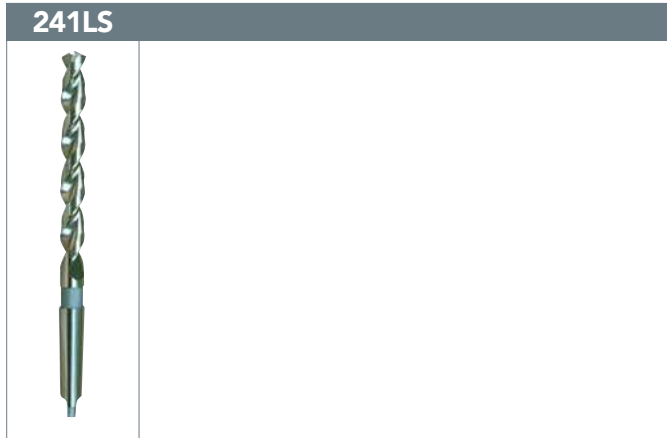

D(h8)	I	L	MT	Stock
mm 13.00	134	215	1	●
13.50	142	223	1	●
14.00	142	223	1	●
14.50	147	245	2	●
15.00	147	245	2	●
15.50	153	251	2	●
16.00	153	251	2	●
16.50	159	257	2	●
17.00	159	257	2	●
17.50	165	263	2	●
18.00	165	263	2	●
18.50	171	269	2	●
19.00	171	269	2	●
19.50	177	275	2	●
20.00	177	275	2	●
21.00	184	282	2	●
22.00	191	289	2	●
23.00	198	296	2	●
24.00	206	327	3	●
25.00	206	327	3	●
26.00	214	335	3	●
27.00	222	343	3	●
28.00	222	343	3	●
29.00	230	351	3	●
30.00	230	351	3	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS