


n **Vf**
PAGE 250-251

DIN 1870 1-2

2701LS - 2702LS (h8)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~30
tol. D µ	0 / -14	0 / -18	0 / -22	0 / -27	0 / -33

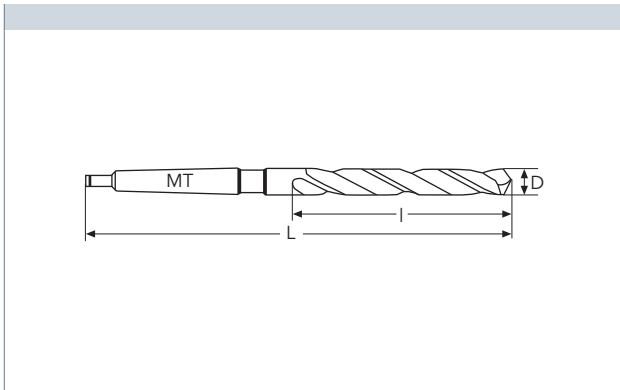

HSS/Co	HSS/Co
BR	BR

D(h8)	I	L	MT	Stock	Stock
mm 24.00	290	440	3	●	●
24.00	365	555	3	●	●
25.00	290	440	3	●	●
25.00	365	555	3	●	●
26.00	290	440	3	●	●
26.00	365	555	3	●	●
27.00	305	460	3	●	●
27.00	385	580	3	●	●
28.00	305	460	3	●	●
28.00	385	580	3	●	●
29.00	305	460	3	●	●
29.00	385	580	3	●	●
30.00	305	460	3	●	●
30.00	385	580	3	●	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS